




# BATWING SLASHER RANGE



WORLD CLASS SLASHERS  
*designed for Australian Conditions*

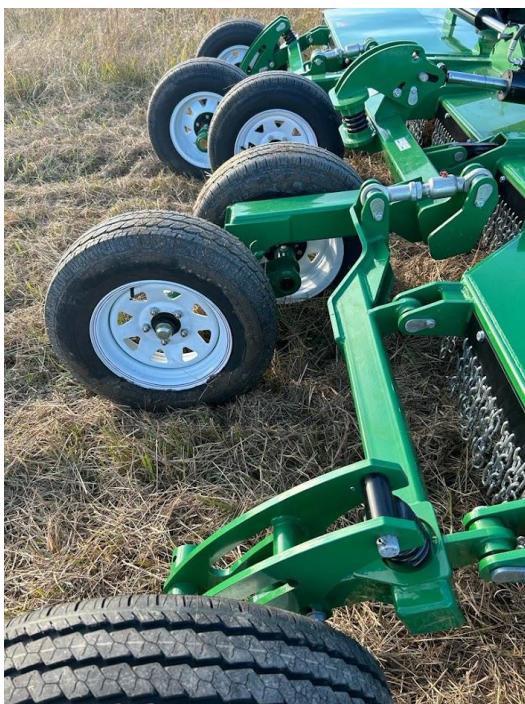

## Product Description


Our heavy-duty mowers are designed for farms, airports, and large-scale agricultural operations. They have a cutting width of 2.6-12m, making them perfect for quickly and efficiently cutting thicker materials.

The mower is built with high-quality components that are designed to last and provide stability, ensuring a smooth cutting experience. Its heavy-duty construction and overload protection clutch allows it to withstand even the toughest conditions.





The centre main board and both wings are controlled by synchronised hydraulic oil cylinders to ensure the same mowing height on both sides.  
Adjustment range: 50-300mm.

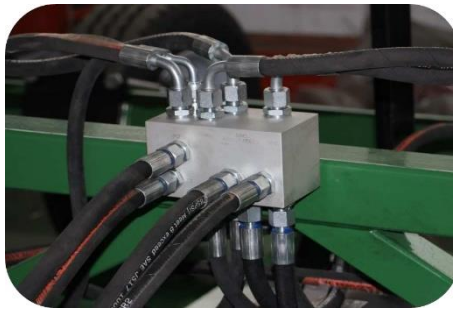

The folding cylinders of both wings are controlled by synchronised valves to achieve synchronised folding.



Drive shaft with overload protection clutch to protect the tractor gearbox.



Self-lubricating wear sleeve installed at all main pins, no need to fill with lubricant.



Optional double knife and fixed shredding blade kit for enhanced shredding of crop residues.



Front and rear synchronised lifting lever with adjustment function, ensures front and rear parallel lifting.



Machine surface sandblasting and electrostatic spraying treatment, environmental protection, wear-resistant, non-fading.



All blade frames are dynamically balanced to ensure the stability of the machine.




Spring shock absorber, to reduce machine vibration.

## Features & Benefits

- Quick Blade Change System (Only hand tools required to change the blades).
- Uses hybrid power – PTO Plus Hydraulic
- Cutting height from 50mm-300mm  
All adjustable from inside the tractor cabin.
- Very strong subframe
- Very high-quality range process
- Swing arm blade design to lengthen life of the blades.
- Choose from 2.4m – 12m cutting width.
- Proven history of performance and reliability
- Full 360-degree protection when operating



# Hercules History

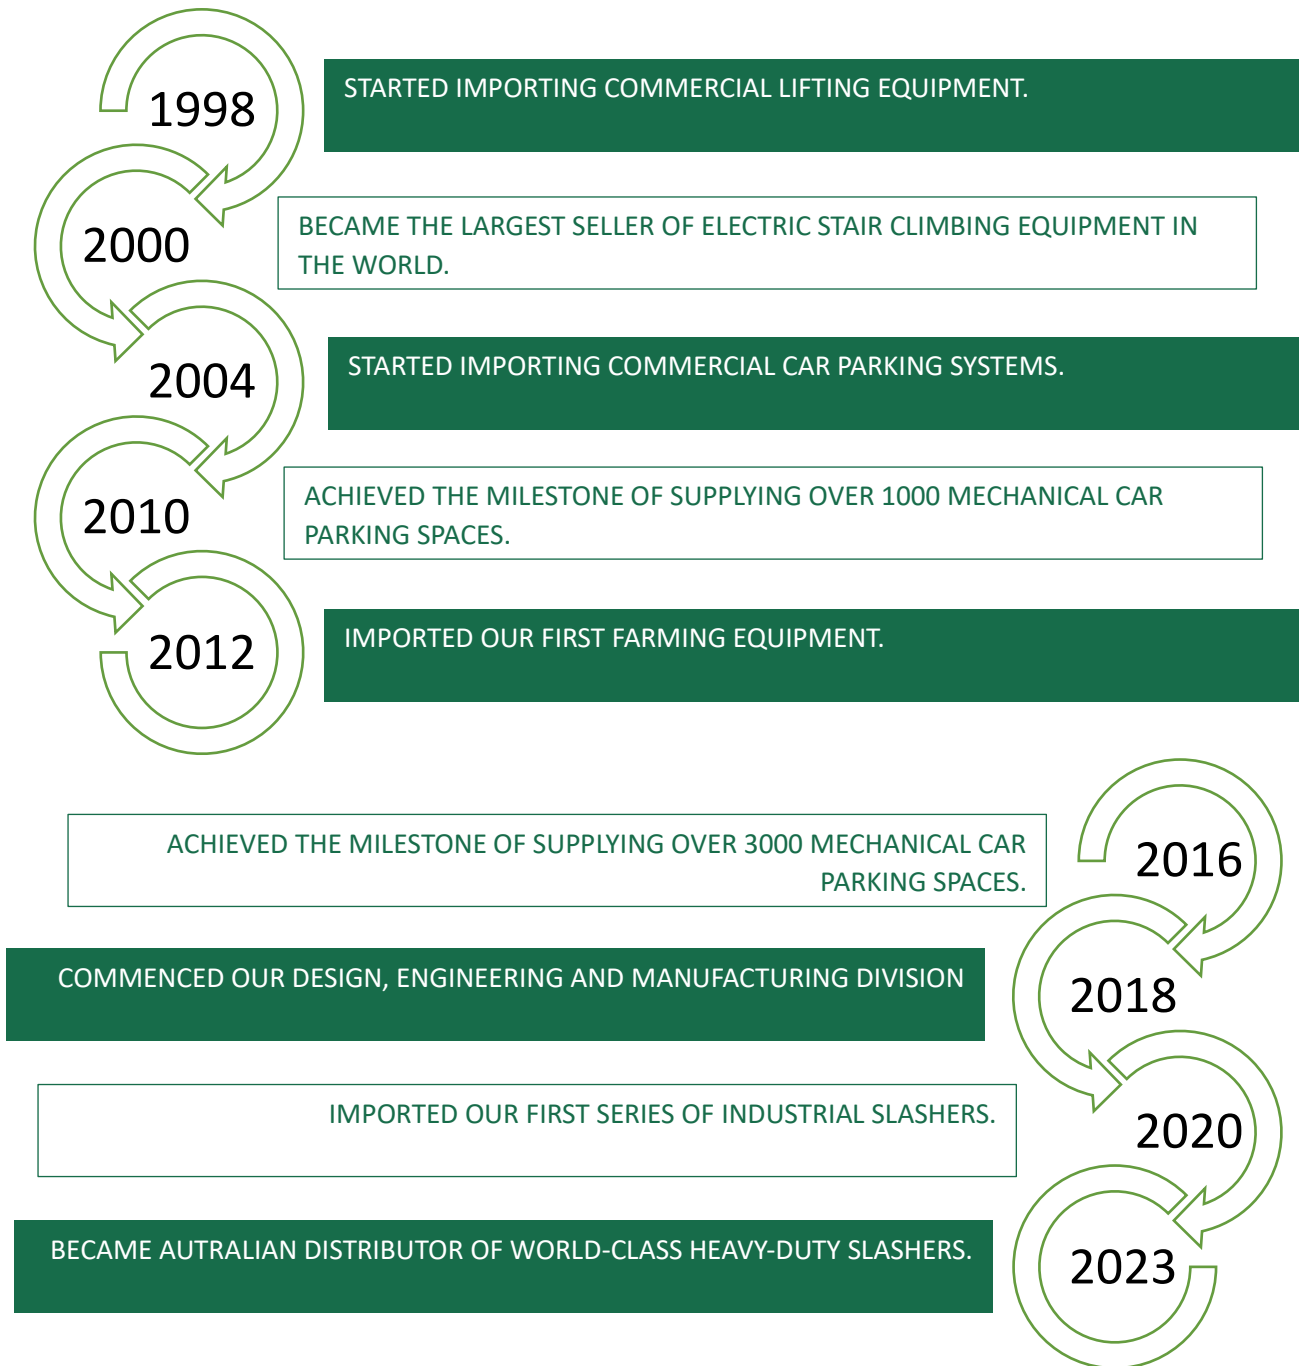



Specifications		Fixed Bed	
Model		W702	W802
Tractor PTO Horsepower	(hp)	> 50	> 60
Horsepower	(kW)	67 (centre) 44 (outside)	67 (centre) 44 (outside)
Cutting Width	(m)	2.1	2.49
Cutting Capacity	(mm)	30	30
Cutting Height Range	(mm)	50-300	50-300
Weight	(kg)	630	690
Transport Width	(m)	2.40	2.69
Dimensions	(mm)	2400 (W) x 2400 (D) x 1220 (H)	2690 (W) x 2410 (D) x 1220 (H)
Quick Change Blade Pins		Yes	
Deck Design		Green Steel cover frame (4mm) / side plate (6mm)	
PTO	(rpm)	540	
Skids	(mm)	10	
Blade Quantity		4	
Blade Size	(mm)	9 x 400	9 x 424
Blade Overlap	(mm)	80	
Blade Tip Speed	(m/sec)	83	
Number of Wheels		2 (height adjustable)	
PTO Shaft		With slip clutch protection	
Deck Slide Depth	(mm)	236	
Warranty		6-year limited gearbox warranty, 1 year deck warranty	





Specifications		Fixed Bed	
Model		W903	W1203
Tractor PTO Horsepower	(hp)	50-70	> 60
Horsepower	(kW)	67 (centre) 44 (outside)	72 (centre) 44 (outside)
Cutting Width	(m)	2.7	3.6
Cutting Capacity	(mm)	30	35
Cutting Height Range	(mm)	50-300	50-300
Weight	(kg)	770	1260
Transport Width	(m)	2.69	2.69
Dimensions	(mm)	2690 (W) x 2810 (D) x 1220 (H)	2690 (W) x 3730 (D) x 1220 (H)
Quick Change Blade Pins		Yes	
Deck Design		Green Steel cover frame (4mm) / side plate (6mm)	
PTO	(rpm)	540	
Skids	(mm)	10	
Blade Quantity		4	
Blade Size	(mm)	9 x 424	9 x 424
Blade Overlap	(mm)	100	
Blade Tip Speed	(m/sec)	83	85.7
Number of Wheels		2 (height adjustable)	
PTO Shaft		With slip clutch protection	
Deck Slide Depth	(mm)	250	
Warranty		6-year limited gearbox warranty, 1 year deck warranty	



Specifications		Batwing Slasher series	
Model		M1203	M1503
Tractor PTO Horsepower	(hp)	50-70	60-85
Gearbox Horsepower	(hp)	190 splitter / 160 spindle	190 splitter / 160 spindle
Cutting Width	(m)	3.6	4.57
Cutting Capacity	(mm)	50	50
Cutting Height Range	(mm)	50-300	50-300
Weight	(kg)	1590	1750
Transport Width	(m)	2.52	2.49
Transport Height	(m)	2	2.13
Overall Width	(m)	3.88	4.83
Over Length	(m)	4.5	5
Quick Change Blade Pins		Yes	
Deck Design		Green Steel cover frame (4mm) / side plate (6mm)	
PTO RPM	(rpm)	540	
Wing Operating Range		10 degrees down / 90 degrees up	
Wing Floating Range		10 degrees down / 25 degrees up	
Skids		Full length replaceable "bolt on" formed side skids on wings	
Shielding		Front and rear chain shielding on wings and centre section	
Wing Hinge Pin	(mm)	25 (full length)	
Tractor Hydraulic Oil Pressure	(mpa)	16	
Blade Quantity		6	
Blade Overlap	(mm)	100	
Blade Tip Speed (centre)	(m/min)	4871	
Blade Tip Speed (blade)	(m/min)	4974	
Hitch Weight	(kg)	600	960
Number of Wheels		4	
Warranty		6-year limited gearbox warranty, 1 year deck warranty	
Ground Clearance When Elevated	(mm)	240	



Specifications		Batwing Slasher series	
Model		M1803	M2005
Tractor PTO Horsepower	(hp)	> 85	> 100
Horsepower	(hp)	260 splitter / 210 spindle	260 splitter / 210 spindle
Cutting Width	(m)	5.5	6.1
Cutting Capacity	(mm)	50	50
Cutting Height Range	(mm)	50-300	50-300
Weight	(kg)	2400	2640
Transport Width	(m)	2.2	2.65
Transport Height	(m)	2.77	3
Overall Width	(m)	5.8	6.5
Overall Length	(m)	5.3	6.1
Quick Change Blade Pins		Yes	
Deck Design		Green Steel cover frame (4mm) / side plate (6mm)	
PTO	(rpm)	540	
Wing Operating Range		10 degrees down / 90 degrees up	
Wing Floating Range		10 degrees down / 25 degrees up	
Skids		Full length replaceable "bolt on" formed side skids on wings	
Shielding		Front and rear chain shielding on wings and centre section	
Wing Hinge Pin	(mm)	25 (full length)	
Tractor Hydraulic Oil Pressure	(mpa)	16	
Blade Quantity		12	20
Blade Overlap	(mm)	100	120
Blade Tip Speed (centre)	(m/min)	4871	4871
Blade Tip Speed (blade)	(m/min)	4974	4974
Hitch Weight	(kg)	1040	
Number of Wheels		6	
Ground clearance when elevated	(mm)	300	
Warranty		6-year limited gearbox warranty, 1 year deck warranty	



Specifications		Batwing Slasher series	
Model		M1803C	M2005C
Tractor PTO Horsepower	(hp)	100	> 110
Horsepower	(hp)	260 splitter / 210 spindle	260 splitter / 210 spindle
Cutting Width	(m)	5.5	6.1
Cutting Capacity	(mm)	75	75
Cutting Height Range	(mm)	50-300	50-300
Weight	(kg)	2630	2990
Transport Width	(m)	2.2	2.65
Transport Height	(m)	2.77	3
Overall Width	(m)	5.8	6.5
Overall Length	(m)	5.3	6.1
Quick Change Blade Pins		Yes	
Deck Design		Green Steel cover frame (5mm) / side plate (6mm)	
PTO	(rpm)	540	
Wing Operating Range		10 degrees down / 90 degrees up	
Wing Floating Range		10 degrees down / 25 degrees up	
Skids		Full length replaceable "bolt on" formed side skids on wings	
Shielding		Front and rear chain shielding on wings and centre section	
Wing Hinge Pin	(mm)	25 (full length)	
Tractor Hydraulic Oil Pressure	(mpa)	16	
Blade Quantity		12	20
Blade Overlap	(mm)	100	120
Blade Tip Speed (centre)	(m/min)	4871	4871
Blade Tip Speed (blade)	(m/min)	4974	4974
Hitch Weight	(kg)	1040	
Number of Wheels		6	
Ground clearance when elevated	(mm)	300	
Warranty		6-year limited gearbox warranty, 1 year deck warranty	





Specifications		Batwing Slasher series	
Model		M2205	M2605
Tractor PTO Horsepower	(hp)	> 140	> 180
Horsepower	(hp)	350 splitter / 210 spindle	350 splitter / 210 spindle
Cutting Width	(m)	6.5	7.98
Cutting Capacity	(mm)	50	50
Cutting Height Range	(mm)	50-300	50-300
Weight	(kg)	3220	3620
Transport Width	(m)	2.65	2.98
Transport Height	(m)	3	3.76
Overall Width	(m)	6.5	8.15
Overall Length	(m)	6.1	5.13
Quick Change Blade Pins		Yes	
Deck Design		Green Steel cover frame (4mm) / side plate (6mm)	
PTO	(rpm)	540	
Wing Operating Range		10 degrees down / 90 degrees up	
Wing Floating Range		10 degrees down / 25 degrees up	
Skids		Full length replaceable "bolt on" formed side skids on wings	
Shielding		Front and rear chain shielding on wings and centre section	
Wing Hinge Pin	(mm)	25 (full length)	
Tractor Hydraulic Oil Pressure	(mpa)	16	
Blade Quantity		20	20
Blade Overlap	(mm)	120	120
Blade Tip Speed (centre)		4871 m/min	275 km/h
Blade Tip Speed (blade)		4974 m/min	285 km/h
Hitch Weight	(kg)	1100	
Number of Wheels		6	
Ground clearance when elevated	(mm)	300	
Warranty		6-year limited gearbox warranty, 1 year deck warranty	



Specifications		Batwing Slasher series	
Model		M3005	M4207
Tractor PTO Horsepower	(hp)	> 200	> 250
Horsepower	(hp)	350 splitter / 210 spindle	350 splitter / 210 spindle
Cutting Width	(m)	9.3	12.8
Cutting Capacity	(mm)	50	50
Cutting Height Range	(mm)	50-300	50-300
Weight	(kg)	5620	8100
Transport Width	(m)	3	3.7
Transport Height	(m)	3.9	4.2
Overall Width	(m)	9.6	13.1
Overall Length	(m)	6	7.4
Quick Change Blade Pins		Yes	
Deck Design		Green Steel cover frame (4mm) / side plate (6mm)	
PTO	(rpm)	540	
Wing Operating Range		10 degrees down / 90 degrees up	
Wing Floating Range		10 degrees down / 25 degrees up	
Skids		Full length replaceable "bolt on" formed side skids on wings	
Shielding		Front and rear chain shielding on wings and centre section	
Wing Hinge Pin	(mm)	25 (full length)	
Tractor Hydraulic Oil Pressure	(mpa)	16	
Blade Quantity		20	28
Blade Overlap	(mm)	120	120
Blade Tip Speed (centre)	(km/h)	275	275
Blade Tip Speed (blade)	(km/h)	280	280
Hitch Weight	(kg)	2950	
Number of Wheels		6	
Ground clearance when elevated	(mm)	300	
Warranty		6-year limited gearbox warranty, 1 year deck warranty	